


MODEL	SPECIFICATIONS
99	
ANTENNA TYPE	DUAL BAND patch antenna with integrated active GPS antenna for mounting on trucks, trailers etc.
GPS antenna: ANTENNA TYPE FREQUENCY IMPEDANCE POLARISATION GAIN (LNA) NOISE FIG. POWER SUPPLY	Active ceramic patch antenna 1575,42 MHz Nom. 50 Ω RHC (Right Hand Circular) Approx. 25 dB Typ 1.8 – 2.2 dB + 3 – 5 VDC (10-30 mA)
GSM antenna: FREQUENCY IMPEDANCE POLARISATION GAIN VSWR	824-960 MHz + 1710-1880 MHz + 1900-2170 MHz Nom. 50 Ω Horizontal 0 / 0 dB < 2.0 at frequency resonance
MAX. POWER	10 Watt
COLOUR	Black
DIMENSIONS	122.2 x 25.2 x 26.5 mm
WEIGHT	Approx. 120 g
MOUNTING	Preferable on horizontal surface
MATERIAL	ABS, brass and PCB

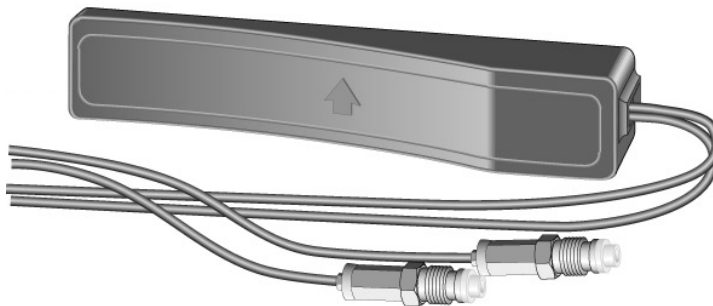

CABLE/CONNECTOR	
99	GSM: 2.5 m RG174/U with FME (female) connector GPS: 2.5m RG174/U with FME (female) connector
99-SMA	GSM: 2.5 m RG174/U with FME (female) connector GPS: 2.5m RG174/U with SMA (male) connector
99-SMB	GSM: 2.5 m RG174/U with FME (female) connector GPS: 2.5m RG174/U with SMB connector

SPARE PARTS	RE-INSTALATION KIT	Art. No. K-99