


MODEL	SPECIFICATIONS
68	(2 - 3V) LOW POWER VERSION
ANTENNA TYPE	Power-saving active mobile GPS antenna for roof, dashboard or in-car window mounting, especially made for hand-held low power GPS receivers * UNIVERSAL AND SIMPLE INSTALLATION * SMALL SIZE – LOW PROFILE DESIGN * WATER PROOF – NON CORROSIVE * LOW POWER CONSUMPTION
FREQUENCY	1575,42 MHz
IMPEDANCE	Nom. 50 Ω
POLARISATION	RHC (Right Hand Circular)
GAIN (LNA) NOISE FIG.	Nom. 28 dB Typ. 0,9 dB
POWER SUPPLY	+ 2,0 – 3,0 VDC (<10 mA)
VSWR	< 2.0
DIMENSIONS	Ø 38,5 x 12,5 mm
COLOUR	Black
BUILD-IN DEPTH	N/A
WEIGHT	Approx. 60 g (3 m cable included)
MOUNTING	Preferable on horizontal surfaces (+-15° tilt allowed) In-car window mounting on low-angle screens only !
MATERIAL	ABS, BRASS, PE and PCB
MOUNT TYPE	Self-adhesive (1 pc adhesive tape for roof-mounting + 1 pc for optionally window mounting is supplied)

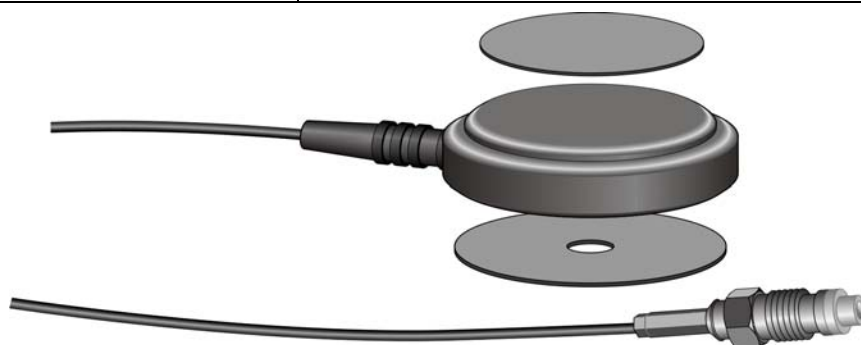

CABLE/CONNECTOR		
68/F-3	3 m RG174 fixed cable with FME (f) connector	
68/F-5	5 m RG174 fixed cable with FME (f) connector	
SPARE PARTS	RE-INSTALATION KIT	Art. No. K-68/69
	VELCRO KIT	Art. No. KB-68/69